

# Technical Data Sheet

## ML-10052-25




### Description

- Broadband, multilayer absorber consisting of graduated layers of loaded open-cell urethane foam.
- It has been designed to provide good absorption in the 860 to 950 MHz range.
- Available with PSA, conductive film backing, and acrylic surface coating.
- Can be water-jet or die cut for custom configurations.
- Halogen free, RoHS and REACH compliant.

| <u>Properties</u>   | <u>Value</u>   |
|---------------------|--|
| Temperature Range   | -70°F to 270°F (-57°C to 132°C)  |
| Thickness           | 2.25" (5.72 cm)  |
| Standard Sheet Size | 24" x 63" (60.96 cm x 160 cm)<br>Other sheet sizes available upon request. |
| Color               | Black  |

### Reflection Loss

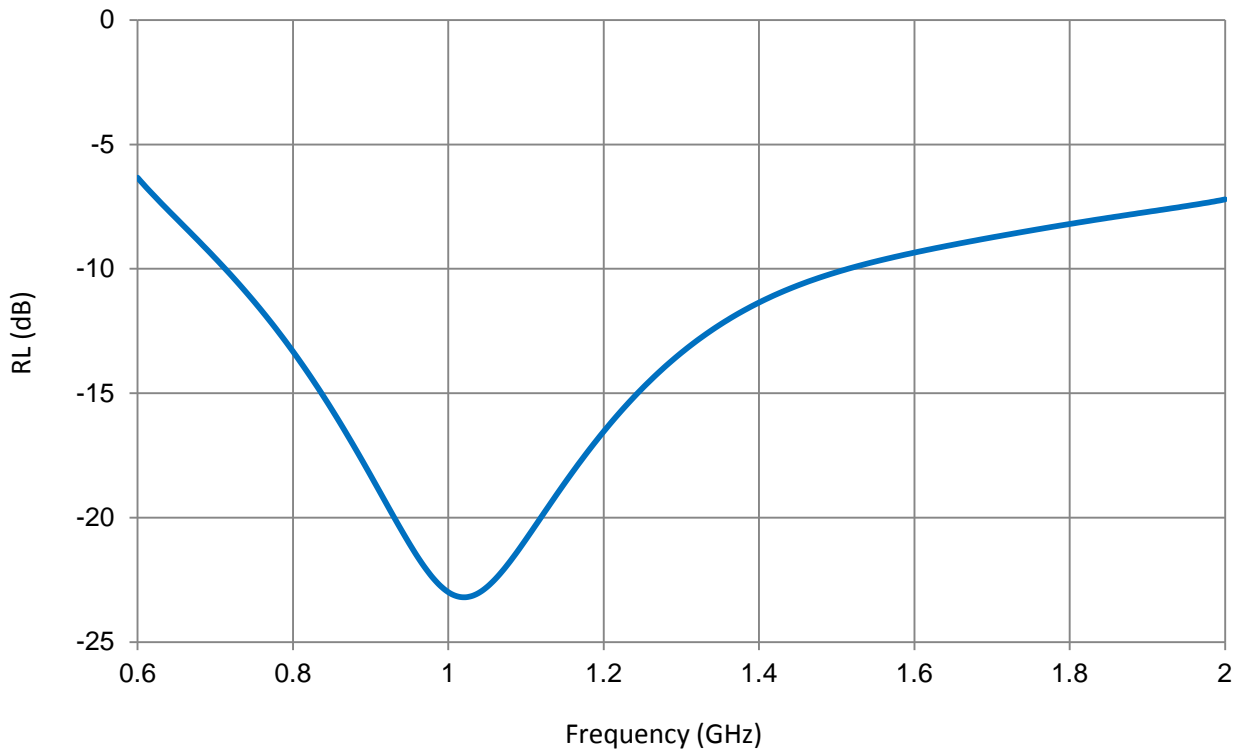

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.